



Air Ratchets

A robust and powerful, reversible air ratchet wrench especially developed for professional workshop applications. Produced from high quality steel with a rolling forged pawl mechanism. Ergonomically designed rubber handle for better grip and insulation from cold air and vibration. Equipped with 360° swivelling air intake to make the machine easier to use with little interference from the air hose. The 3/8" set is supplied in a handy carrying case with recessed handle, click lock mechanism and rubber feet, including 9 impact sockets, extension bar, an adaptor from 3/8" - 1/2", a mini oiler and 10ml of air tool oil. The 1/2" set is supplied in a handy carrying case with recessed handle, click lock mechanism and rubber feet, including Teng Tools impact sockets, extension bars, universal joint (1/2" drive set only), mini oiler and 10ml of air tool oil. Both have a ball type square drive for the impact sockets.

Stock no		205730104	205730203
Square drive	inch	3/8	1/2
Impact sockets - regular	mm	8, 10, 12, 13, 14, 16, 17, 19	10, 11, 12, 13, 15, 17, 19
Impact sockets - deep	mm	8, 10, 12, 13, 14, 16, 17, 19	10, 11, 12, 13, 15, 17, 19
Extension bars	inch	3"	3" & 5"
Adaptor	pcs	3/8" F: 1/4" M & 3/8" F: 1/2" M	1/2" F: 3/8" M
Bolt capacity	mm	M5-M8	M6-M10
Free speed	rpm	240	240
Max. torque	Nm	120	120
Max. torque	ft-lb	90	90
Recommended torque range	Nm	15-100	15-100
Recommended torque range	ft-lb	11.2-75	11.2-75
Sound level (ISO 8662-7)	dB (A)	92	92
Vibration (ISO 15744:1999)	m/s ²	<3.5	<3.5
Min. hose size	inch	3/16	3/16
Air Inlet	inch	1/4	1/4
Air consumption at 100% int*	l/min	755	755
Air consumption at 15% int*	l/min	113	113
Air consumption at 100% int*	cfm	26.6	26.6
Air consumption at 15% int*	cfm	4.0	4.0
Length	mm	330	330
Weight	kg	3.3	3.3
Price		£159.90	£169.90



3/8" and 1/2" air ratchet sets

A robust and powerful, reversible air ratchet wrench especially developed for professional workshop applications. Produced from high quality steel with a rolling forged pawl mechanism, ergonomically designed rubber handle for better grip and insulation from cold air and vibration. Air intake to make the machine easier to use with little interference from the air line. Trigger recessed in to handle for a more comfortable grip. Supplied in a handy carrying case. The 3/8" drive set includes 9 Teng Tools impact sockets, extension bar, an adaptor from 3/8" to 1/2", a mini oiler and 10ml of air tool oil. The 1/2" drive set includes 7 Teng Tools impact sockets, extension bar, universal joint, a mini oiler and 10ml of air tool oil.

Stock no		TA3812	TA1217
Square drive	inch	3/8	1/2
Impact sockets - standard	mm	8, 10, 11, 12, 13,	8, 10, 11, 12, 13,
		15, 16, 17, 19	15, 16, 17, 19
Extension bar	mm	75	75
Accessories		3/8" F: 1/2" M adaptor	universal joint
Bolt capacity	mm	M5-M8	M6-M10
Free speed	rpm	150	150
Max. torque	Nm	95	95
Max. torque	ft-lb	70	70
Recommended torque range	Nm	14-82	14-82
Recommended torque range	ft-lb	10.5-61	10.5-61
Sound level (ISO 8662-7)	dB (A)	91	91
Vibration (ISO 15744:1999)	m/s ²	0.96	0.96
Min. hose size	inch	3/16	3/16
Air Inlet	inch	1/4	1/4
Air consumption at 100% int*	l/min	570	570
Air consumption at 15% int*	l/min	86	86
Air consumption at 100% int*	cfm	9.5	9.5
Air consumption at 15% int*	cfm	3.1	3.1
Weight of machine	kg	1.1	1.1
Weight of set	kg	3.0	3.0
Price		£95.50	£98.50

TENGOOLS

NEW





Air ratchets



NEW



1/2" drive air ratchet set

1/2" drive air ratchet supplied in a handy storage case together with swivelling air inlet joint, 4 sockets (11, 12, 13 and 14mm), extension bar, bit adaptor and 4 screwdriver bits. Delivers approx 60 Nm torque. Working pressure 6 bar. Air consumption 390 l/min (13.8 cfm). Weight 1.2 kilos.

Stock No	PRICE
2401550	£45.20



NEW



1/4" and 3/8" drive air ratchet set

A handy air ratchet with 1/4" and 3/8" adaptor and 5 sockets with 17mm fitment covering 8, 10, 12, 13 and 14mm. Delivers approximately 40Nm torque. Maximum working pressure 6.3 bar. Air consumption 450 l/min (15.9 cfm). Weight 0.55 kilos.

Stock No	PRICE
2401700	£150.00


Luna Air Ratchets

Robust and powerful air ratchet wrenches especially developed for professional workshop applications and featuring –

- Produced from high quality steel with a rolling forged pawl mechanism
- Ergonomically designed rubber handle for a better grip and insulation from cold air and vibration
- Equipped with 360° swivelling air intake to make the machine easier to use with little interference from the air hose
- New style trigger for more comfortable use
- New style carrying case sets combining Luna impact wrenches with Teng Tools impact sockets and accessories

Air Ratchets

A robust powerful air ratchet wrench especially designed for professional workshop applications. Produced from high quality steel with a rolling forged pawl mechanism. Ergonomically designed rubber handle for better grip and insulation from cold air and vibration. 360° swivelling air outlet to direct the air away from the user.

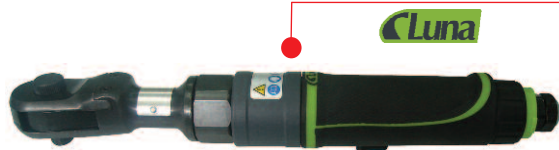

Stock no	205720105	205720204
Square drive	inch 3/8	1/2
Bolt capacity	mm M5-M8	M6-M10
Free speed	rpm 240	240
Max. torque	Nm 120	120
Max. torque	ft-lb 90	90
Recommended torque range	Nm 15-100	15-100
Recommended torque range	ft-lb 11.2-75	11.2-75
Sound level (ISO 8662-7)	dB (A) 92	92
Vibration (ISO 15744:1999)	m/s ² <3.5	<3.5
Min. hose size	inch 5/16	5/16
Air Inlet	inch 1/4	1/4
Air consumption at 100% int*	l/min 755	755
Air consumption at 15% int*	l/min 113	113
Air consumption at 100% int*	cfm 26.6	26.6
Air consumption at 15% int*	cfm 4.0	4.0
Length	mm 330	330
Weight	kg 1.35	1.35
Price	£110.00	£110.00

At 6.2 bar


All prices exclude VAT and are subject to availability



3/8" and 1/2" ratchets

A robust and powerful, reversible air ratchet wrench especially developed for professional workshop applications. Produced from high quality steel with a rolling forged pawl mechanism, ergonomically designed rubber handle for better grip and insulation from cold air and vibration. Air intake to make the machine easier to use with little interference from the air line. Trigger recessed in to handle for a more comfortable grip.

Stock no		AR38	AR12
Square drive	inch	3/8	1/2
Bolt capacity	mm	M5-M8	M6-M10
Free speed	rpm	150	150
Max. torque	Nm	95	95
Max. torque	ft-lb	70	70
Recommended torque range	Nm	14-82	14-82
Recommended torque range	ft-lb	10.5-61	10.5-61
Sound level (ISO 8662-7)	dB (A)	91	91
Vibration (ISO 15744:1999)	m/s ²	0.96	0.96
Min. hose size	inch	5/16	5/16
Air Inlet	inch	1/4	1/4
Air consumption at 100% int*	l/min	570	570
Air consumption at 15% int*	l/min	86	86
Air consumption at 100% int*	cfm	9.5	9.5
Air consumption at 15% int*	cfm	3.1	3.1
Weight of machine	kg	1.1	1.1
Weight of set	kg	3.0	3.0
Price		£72.50	£72.50

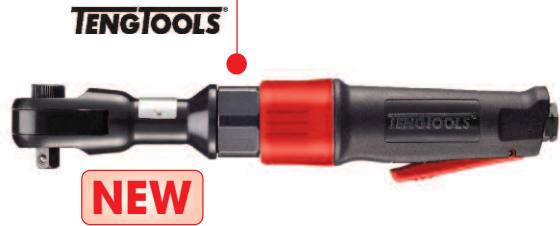

1/2" drive air ratchet

Powerful 1/2" drive air ratchet with rubber coated head to avoid scratching, ergonomic anti-slip grip giving insulation against cold air and reduced vibration. Simple to adjust directional change. Delivers 135 Nm torque, 160rpm speed. Working pressure 6.3 bar. Air consumption 170 l/min (6.0 cfm). Weight 1.2 kg.

Stock No	PRICE
2401520	£99.50


NEW



Air Ratchets - Stubby

A robust powerful air ratchet wrench especially designed for professional workshop applications. Produced from high quality steel with a rolling forged pawl mechanism. Ergonomically designed rubber handle for better grip and insulation from cold air and vibration. Equipped with 360° swivelling air intake to make the machine easier to use with little interference from the air hose. The 3/8" model has a built in quick release function for the sockets.

Stock no		207330101	207330200
Square drive	inch	1/4	3/8
Bolt capacity	mm	M10	M10
Free speed	rpm	280	280
Max. torque	Nm	34	34
Max. torque	ft-lb	25.2	25.2
Recommended torque range	Nm	8-34	8-34
Recommended torque range	ft-lb	5.9-25.2	5.9-25.2
Sound level (ISO 8662-7)	dB (A)	89.1	87.5
Vibration (ISO 15744:1999)	m/s ²	<2.32	<2.97
Min. hose size	inch	3/8	3/8
Air Inlet	inch	1/4	1/4
Air consumption at 100% int*	l/min	420	420
Air consumption at 15% int*	l/min	63	63
Air consumption at 100% int*	cfm	2.0	2.0
Air consumption at 15% int*	cfm	0.3	0.3
Length	mm	165	165
Weight	kg	0.53	0.53
Price		£105.00	£105.00

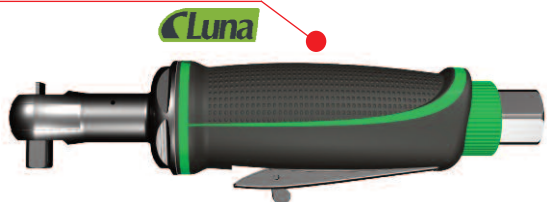

At 6.2 bar



Air ratchets & screwdrivers



1/4" drive air ratchet

NEW

Compact 1/4" drive air ratchet for difficult to reach places. Rubber coated head to avoid scratching, simple to adjust directional change. Delivers 33Nm torque, 110 rpm speed, Maximum working pressure 6.3 bar. Air consumption 210 l/min (7.4 cfm). Weight 0.5 kilos.



Stock No	PRICE
2401500	£69.50

Air Screwdrivers

Air Screwdrivers

A professional quality reversible air screwdriver for 1/4" hex bits with variable speed trigger, forward/reverse control, ergonomically designed comfortable grip and handle exhaust for better grip and insulation from cold air and vibration. Equipped with 360° swivelling air intake to make the machine easier to use with little interference from the air line. Supplied with 3 different torque springs to suit individual applications. Features include a quick release bit holder and an adjustable clutch mechanism on tightening and full power without clutch for loosening to remove even the most stubborn fastenings. The machine has an automatic start when the bit is pressed to the fastening and the trigger pulled.



Stock no	207750100	
Drive	hexagon	1/4
Screw capacity	mm	6
Free speed	rpm	800
Torque	Nm	1.1-14.6
Sound level (ISO 8662-7)	dB (A)	82
Vibration (ISO 15744:1999)	m/s ²	<0.7
Hose size	inch	3/8
Connection thread		1/4
Air consumption at 100% int*	l/min	555
Air consumption at 20% int*	l/min	111
Air consumption at 100% int*	cfm	19.6
Air consumption at 20% int*	cfm	3.9
Weight	kg	0.95
Price		£129.90

At 6.2 bar

A professional quality reversible straight model reversible air screwdriver for 1/4" hex bits, reversible, ergonomically designed comfortable grip with handle exhaust for better grip and insulation from cold air and vibration. Equipped with 360° swivelling air intake to make the machine easier to use with little interference from the air line. Supplied with three different torque springs to suit individual applications. Features include a hanging ring and adjustable clutch mechanism. The machine has an automatic start when the bit is pressed to the fastening.



Stock no	200280105	
Drive	hexagon	1/4
Screw capacity	mm	6
Free speed	rpm	1100
Torque	Nm	0.4-4.5
Sound level (ISO 8662-7)	dB (A)	84
Vibration (ISO 15744:1999)	m/s ²	0.5
Hose size	inch	3/8
Connection thread		1/4
Air consumption at 100% int*	l/min	565
Air consumption at 20% int*	l/min	113
Air consumption at 100% int*	cfm	20.0
Air consumption at 20% int*	cfm	4.0
Weight	kg	0.7
Price		£310.00

At 6.2 bar